

# Twentyfive Years Young Collection



25YY

Twentyfive  
Years Young  
Collection

1993 2018



Nice

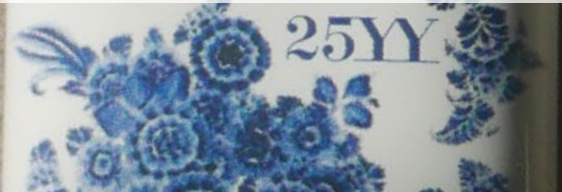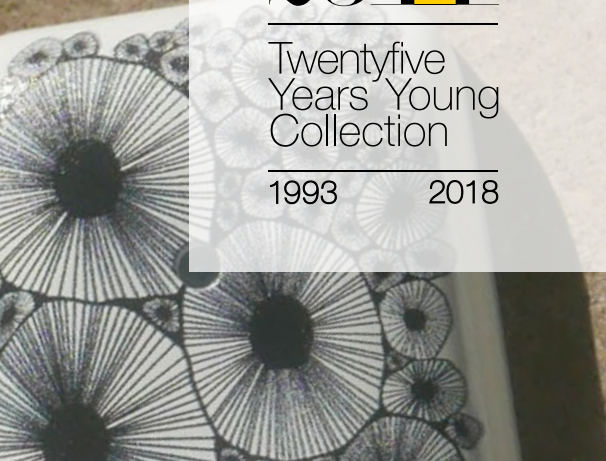

# Twentyfive Years Young Collection

25YY

Twentyfive  
Years Young  
Collection

1993 2018

We are twenty-five, so our strength does not come from tradition, but from our attitude of questioning existing rules, of trying alternative ways, with the aim of simplifying everyone's movements. As young people, who enter the second phase of their life at 25, we keep pursuing our dream of a future without barriers, with more maturity and the same passion.

With our limited edition transmitters dedicated to Nice's 25 years, we wanted to celebrate our origins: the control electronics that contributed to Nice's success right from the start, our passion for design and creativity and our constant commitment to creating products conceived for people's comfort.




Black  
Flowers



Henri  
Yellow




Blue  
Bird



Autumn  
Leaves



Paul  
Stripes

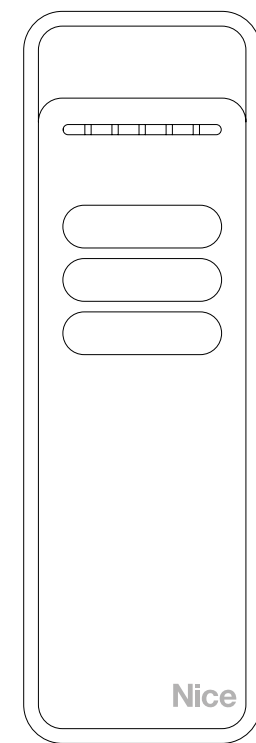

# Nice IntiKit 25YY Collection

## Universal control system for all types of gate and garage door.

Kit with 3 Inti 225YY transmitters and 1 OX2 receiver.

Ideal for blocks of flats and multi-user installations.

Inti transmitters can also be used as elegant colourful key-rings, thanks to the cord included in the pack.

433.92 MHz, rolling code with self-learning, Identity Code and Certificate management and built-in proximity reader; with 72 bit O-Code encoding, also compatible with receivers with Nice FloR encoding.

Easy to programme even at a distance, thanks to the Opera receivers.

Without having to be near the system, you can enable a new Inti transmitter in two different ways:

- using a transmitter already enabled in the receiver, thanks to identity code exchange between the two;
- by the Nice O-Box multifunction interface which activates the Certificate of the receiver by simply placing the new Inti near the O-Box and launching the guided procedure from a PC or PDA.

**Secure:** if a transmitter is stolen or lost, it can be replaced through the O-Box, maintaining the same functions as before, and the old transmitter can be disabled by increasing the priority level on the new Inti.

Code	Description	Pcs./pack
<b>INTIKIT 25YY</b>	Kit with 3 Inti 25YY two-channel, 433.92 MHz, transmitters and 1 OX2 receiver. Decorative themes: Black Flowers, Henri Yellow and Blue Bird.	1

### TRANSMITTER TECHNICAL SPECIFICATIONS

Carrier frequency	Estimated range	Encoding	Power supply	Battery life	Protection class	Dimensions Weight
433.92 MHz	150 m (outdoors); 30 m (indoors)*	72 bit O-Code; rolling code	3 Vdc; CR2032 lithium battery	2 years (with 10 transmissions per day)	IP40 (use in protected environments)	30x56x9 h mm 14 g

\* Transmitter range and receiver reception capacity may be affected by any devices operating on the same frequency in the area.



# Nice Era P 25YY Collection

## Portable transmitters to control awnings, blinds and rolling shutters.

To control one automation or group of automations. 433.92 MHz, rolling code with self-learning.

Ergonomic design, intuitive use and practical wall support as standard.

### Easy programming

The same transmitter can be programmed in a number of awnings, blinds or rolling shutters to create groups.

New transmitters can be duplicated remotely and automatically just by placing the new transmitter next to the one already programmed and pressing a key.

Extended operating autonomy (two AAA 1.5 V alkaline batteries).

Long range 200 m in open space, 35 m indoors.

Code	Description	Pcs./pack
<b>P1/25YYA</b>	Portable transmitter to control 1 electrical load system or automation group. Theme: Autumn Leaves	1
<b>P1/25YYB</b>	Portable transmitter to control 1 electrical load system or automation group. Theme: Paul Stripes	1

### TECHNICAL SPECIFICATION

Code	P1/25YYA, P1/25YYB
Power supply (Vdc)	Alkaline batteries - 2 x AAA 1.5 V
Battery lifetime	About 2 years with 10 transmissions per day
Frequency	433.92 MHz ± 100 KHz
Protection class (IP)	40 (Use in the home or in protected environments)
Average range (m)	Estimated average range 200 in open space, 35 indoors
Radio encoding	Rolling code (O-code)
Operating temperature (°C min/max)	-5 ÷ +55
Dimensions (mm)	49x150x14
Weight (g)	85



Easy and automatic duplication by simply placing the two transmitters near each other.



Intuitive programming procedure using the keys on the back of the transmitter.



Handy wall support as standard.

# Technology as simple as a gesture



## Nice, easy solutions for Home and Building.

Automation and control systems for gates, garage doors, awnings, blinds, roller shutters and alarm systems, with integrated management through smart intuitive interfaces: practical, functional and elegant solutions for the ideal way to live every space.

**Nice**

Nice SpA  
Oderzo TV Italy

[www.niceforyou.com](http://www.niceforyou.com)



NiceLoveEarth

Nice cares for the environment.  
By using recycled paper it avoids  
excessive use of raw materials  
and forest exploitation.  
Waste is reduced, energy is saved  
and climate quality is improved.

Our products and our technologies  
are protected with patents, design  
models and brands. All violations  
will be prosecuted.