




Nice

# Domì Climatic Sensor

Wind-sun-rain sensors for awnings

Nice

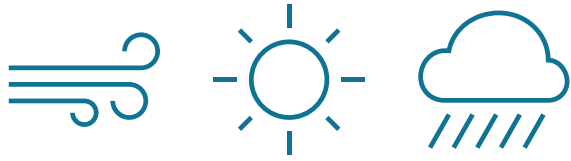

New line of bidirectional climatic sensors, available in three different models: **wind-sun**, **wind-sun-rain** and wireless wind-sun.

# Domì, Climatic Sensor



DOMIWSR

#### Wide threshold adjustment

Wind threshold setting up to 120 km/h



DOMIWSC

— **Long working life**, thanks to the materials chosen to ensure excellent resistance to atmospheric agents

IP55



DOMIWS

— **Optimised sensitivity to vertical air currents**



BiDi

Yubii\*

NFC

### Available versions:



### BD WIND-SUN and BD WIND-SUN-RAIN

**Powered by mains electricity, communicates with the control unit via radio.**



### BD SOLAR WIND-SUN

**No connection and unlimited autonomy.** The sensor is **powered by solar energy** and communicates with the control unit via radio. The photovoltaic cells powering the sensor provide a reserve of energy and guarantee optimum and safe management of the automation.

**Bidirectional:** Domì climatic sensors are compatible with **up to two bidirectional motors** and also the monodirectional versions.

### Compatible with:

- Nice tubular motors with built-in radio receiver;
- control units with built-in receiver.

### Programming in linear mode:

adjustment of activation thresholds: “wind” up to 120 km/h, “sun” up to 60 klux.

**Adjustment:** by adjusting the test threshold, operation of the Sun-Wind sensors can be verified without simulating the presence of atmospheric events.

In the wind-sun-rain model, the rain sensor does not require adjustment (on-off).

### Control and indicator system:

An LED provides information on sensor status (set threshold exceeded, malfunctions etc.).

### Differentiated threshold adjustment\*

By implementing the Yubii Home system, customised scenarios can be used to set different thresholds for each motor.

### Advanced threshold setting

Easy thresholds settings via TTPRO and NFC via the MyNice Pro App.

### TECHNICAL SPECIFICATIONS

Code	Description	Pcs./pack	Certificates
<b>DOMIWS</b>	Bidirectional Wind-Sun sensor, powered by mains electricity	1	CE
<b>DOMIWSC</b>	Bidirectional Wind-Sun sensor, powered by built-in photovoltaic cells	1	CE
<b>DOMIWSR</b>	Bidirectional Wind-Sun-Rain sensor, powered by mains electricity	1	CE


Code	DOMIWS	DOMIWSC	DOMIWSR
Powered by built-in photovoltaic cells (mWp)	-	100	-
Powered by mains electricity (VAC 50/60 Hz)	110/230	-	110/230
Transmission frequency (MHz)	433 MHz		
Radio coding	BiDi/backward compatible with unidirectional		
Radiated power (mW)	1		
Range	100 m in open space and 20 m indoors		
Protection class (IP)	55		
Operating temperature (°C min/max)	-20 - +60	-10 ÷ +60	-20 ÷ +60
Dimensions (mm)	85x225x114 h		
Weight (g)	236		

WIND SENSOR	DOMIWS	DOMIWSC	DOMIWSR
Measurement range (km/h)	10 - 120		
Resolution (km/h)	1		
Threshold setting (km/h)	20 - 100		


SUN SENSOR	DOMIWS	DOMIWSC	DOMIWSR
Resolution(klux)	0 - 83		
Threshold setting (klux)	5 - 60		

RAIN SENSOR	DOMIWS	DOMIWSC	DOMIWSR
Measurement range	-	-	On-Off


### INSTALLATION ON SURFACES SLOPING AT DIFFERENT ANGLES

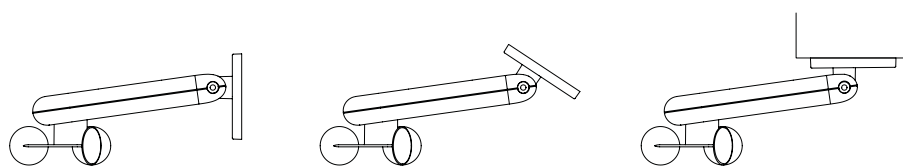


\* Coming Soon



DESIGNED FOR INSTALLERS



**MyNice Pro App**



# We make even the smallest of gestures extraordinary.

## Nice, a world without barriers.

Automation and control systems for gates, garage doors, blinds, awnings and rolling shutters and alarm systems for all types of space, from private homes to large public buildings.

[www.niceforyou.com](http://www.niceforyou.com)

Nice SpA  
Oderzo, TV, Italy



Nice cares for the environment.  
Using natural paper it avoids  
excessive use of raw materials  
and forest exploitation.  
Waste is reduced, energy is saved  
and climate quality is improved.