



Rondo,
for balanced rolling
shutters up to 170 kg

Nice

Nice

OPERA

230V

Rondo

For balanced rolling shutters up to 170 kg

Electromechanical irreversible gearmotor irreversible.

Smart: the wiring are protected by an elegant box; pre-wired capacitor.

Fast: easy and intuitive adjustment of the limit switches both during opening and closing.

Complete: with 200 mm external flange diameter and 220 mm adapters, for 60 mm shafts and adapters for 48 mm.

Easy to install: thanks to the guided connector, you don't need to hold the motor while you secure it using just 3 screws.

Recommended control unit MC200, easy, complete and reliable with:

- compatible with the Opera system;
- remote control with the MyNice Welcome app (IT4WIFI interface is needed);
- semi-automatic or automatic operation;
- complete reverse run with photocell;
- step-by-step operation;
- programmable Step-by-step/Open input;
- programmable Stop/Photo input;
- input for resistive edge;
- incorporated radio card, compatible with the Nice Flo, FloR and Smilo systems.



Sturdy: housing
in 100% aluminium

Practical: easy to adjust, electromechanical
limit switches both during closing and
opening

Complete: designed
for cordoperated
release

COMMON ACCESSORIES



IBT4N
Interface for connecting the O-View programming unit.
Pc./Pack 1



IT4WIFI
Smart Wi-fi interface to manage gates and garage doors by smartphone.
Pc./Pack 1



MC200
Control unit with automatic closing.
Pc./Pack 1



KIO
Key-operated selector switch for low voltage contacts, with release mechanism for metal cord.
Pc./Pack 1



KIOMINI
Aluminium key switch/switch lock box with control and release button.
Pc./Pack 1




TS
Signboard.
Pc./Pack 1

TECHNICAL SPECIFICATIONS

Code	Description	Pack/Pallet
RN2040	For balanced rolling doors up to 170 kg, irreversible, with brake and release device	40
Code		
		RN2040
ELECTRICAL DATA		
Power supply (Vac 50 Hz)*		230
Absorption (A)		2.7
Power (W)		630
PERFORMANCE DATA		
Speed (rpm)		10
Torque (Nm)		170
Continuous operating time (min)		4
DIMENSIONAL AND GENERAL DATA		
Protection level (IP)		20
Working temp. (°C Min/Max)		-20 ÷ +50
Dimensions (mm)		200x350
Weight (kg)		8

* 120 Vac version available on request.

DIMENSIONS

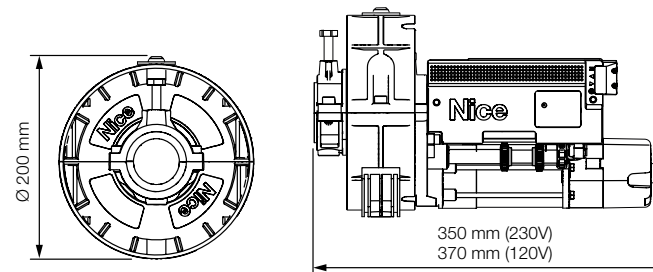

COMPATIBILITY TABLE WITH CONTROL SYSTEMS AND ACCESSORIES

Code	control unit/receiver								transmitter					photocells								flashing light				
	MC200 / Built-in*	MC800 / OXI / OXIBD / OXILR	DPR6500 / OXI / OXIBD / OXILR	DPR6924 / OXI / OXIBD / OXILR	MC424L / Built-in* / OXI / OXIBD / OXILR	MC824H / OXI / OXIBD / OXILR	MC824HR / OXI / OXIBD / OXILR	ERA INTI	ERA ONE	ERA ONE BD	ERA ONE LR	ERA FLOR	NICEWAY	EPS	EPM	EPL	EPSB	EPMB	EPLB	EPMOR	F210	FT210	F210B	FT210B	ELAC	ELDC
RN2040	•						•	•			•	•	•	•	•				•	•	•			•		

* Radio receiver incompatible with Opera system

Technology as simple as a gesture



Nice, easy solutions for Home and Building.

Systems for the automation and control of gates, garage doors, blinds, shutters and alarm systems, with integrated management using smart and intuitive interfaces: practical, functional and elegant solutions to help you enjoy your living spaces to the full.

Nice

Nice SpA
Oderzo TV Italy

www.niceforyou.com



NiceLoveEarth

Nice cares for the environment.
Using natural paper it avoids excessive
use of raw materials and forest exploitation.
Waste is reduced, energy is saved and
climate quality is improved.

Our products and technologies
are protected with patents and design
trademark registrations. Any violation
of our rights will be legally prosecuted.